


# SHS\_\_-5-L

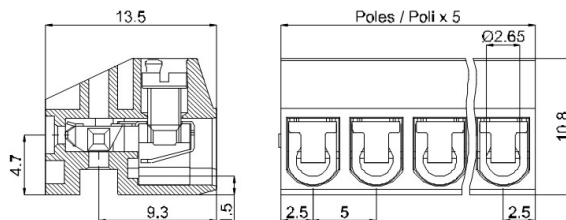

## GENERAL INFORMATION

pitch	5 mm
Height	10.8 mm
Depth	13.5 mm
Dimensional class	Media
Wire section	1.5 mm <sup>2</sup> / 16 AWG
Clamp opening size	-
Wire stripping	max 6 mm
Operating temperature	-40 ÷ +130 °C

## ELECTRICAL CHARACTERISTICS

Current	10 A
Voltage	250 V
impulse voltage	4 kV

## MECHANICAL CHARACTERISTICS

Screw	M2.5
Recommended torque	0.4÷0.44 Nm / 3.6÷3.9 in.lbs

## APPROVALS DATA



		EN 61984	UL 1059
Current	-	12 A	10 A factory / 10 A field
Voltage	-	200 V	300 V
Wire section	-	0.2÷2.5 mm <sup>2</sup>	16 AWG
Torque	-	0.4 Nm	3.5 Lb-in
FILE	-	40053107	E178356

## MATERIALS

Housing	PA - UL 94 V0
Screw	Galvanized steel
Clamp	Nickel-plated copper alloy
Terminal	Copper alloy
SCIP Number	f59fce50-2030-4a8c-a1d5-32dbe6d47a1f

## COLOURS

Standard

On request

**BK**

**GN**

**GY**

**BL**

**RD**

**YL**

**OG**

<b>POLES</b>	<b>NAME</b>	<b>3D FILE</b>
02	SHS02-5-L	File available
03	SHS03-5-L	File available
04	SHS04-5-L	File not available for this product
05	SHS05-5-L	File not available for this product
06	SHS06-5-L	File not available for this product
07	SHS07-5-L	File not available for this product
08	SHS08-5-L	File not available for this product
09	SHS09-5-L	File not available for this product
10	SHS10-5-L	File not available for this product
11	SHS11-5-L	File not available for this product
12	SHS12-5-L	File not available for this product